



ENTRANCE WITH CLASS

FRONT ENTRY DOORS / **AP series**



ECO-HOME with Dor-Jan

Front entry doors; aren't they one of the most important parts of our home? They protect us from the cold, the rain, and the burglars, to mention just a few examples. Doors also keep us away from street noise. But how do you make the right choice, and buy a door that will meet our expectations and serve us for years?

An issue that requires careful consideration before the purchase is the heat transfer coefficient (U). The lower its value, the more heat will stay with us inside. We offer panelled doors with the UD coefficient of 0.50 W/(m² K).

When choosing our door, let's not forget to check out their water resistance. It's the water resistance of the door that will keep the driving rain outside in times of strong winds and heavy rain. The higher the class, the better the door protects our home. We offer panelled doors rated E1200 (1200 Pa).

Infill panels are included in door leaves based on the MB-70, MB-79N, MB-86 and MB-104 Passive system, and come in a variety of colours and structures. The elements can be milled, decorated with applications or made of insulated glass. **Panelled doors can be fabricated very large and high – up to 1.40 m (W) and almost 2.60 m (H).** If, therefore, we dream of an impressive front entrance, this will be the perfect choice. But above all, the door should fit to the style of your home. If our interiors are the traditional ones, we should opt for a leaf with glass panels or wooden-like veneer. Lovers of modern interior can choose among RAL colours, think shade of graphite.

Let's take some time and choose a door with which we will create a beautiful entrance that will enchant our guests and will make us feel like we were in a safe haven.

MB-104 Passive


U_D from 0.50 W/m²K

Our panel door uses thermally insulated aluminium profile system – MB-104 Passive is the most technologically advanced door system offered by us. The leaf profile can be combined with special infills, aligned with the surface of the frame. The system is dedicated to passive and energy-efficient buildings.

Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Design variants: SI, SI+ and AERO

Central gaskets around the leaf and the frame to seal, cover, and increase the thermal insulation of the door

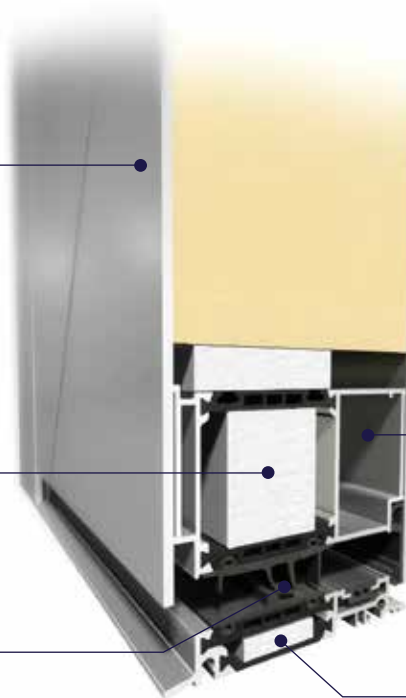

Technical details:

| | |
|--------------------------------|----------------------------------------|
| Frame depth | 95 mm |
| Leaf depth | 95 mm |
| Infill panel thickness | up to 95 mm |
| Maximum dimensions of the leaf | (H×L) L up to 1400 mm, H up to 2600 mm |

Technical parameters:

| | |
|----------------------|------------------------------------|
| Air permeability | Class 4, EN 12207 |
| Water tightness | Class E1200 (1200 Pa), EN 12208 |
| Wind load resistance | Class C4/B4, EN 12210 |
| Thermal insulation | U_D from 0.50 W/m ² K |
| Burglary-resistance | RC2 |

Expansion joint profiles

95 mm-wide warm threshold - the same width as the threshold and frame

MB-86

U_D from 0.66 W/m²K

Our panel doors use thermally insulated aluminium profile system – MB-86 – which, just like the MB-104 Passive system, is dedicated to energy-efficient and passive building. The leaf profile can be combined with special infills, aligned with the surface of the frame.

Aesthetically pleasing, decorative panels are available in various designs and colours

They come in four versions: ST, SI, SI + and AERO for a very good thermal performance



Technical details:

| | |
|--------------------------------|----------------------------------------|
| Frame depth | 77 mm |
| Leaf depth | 77 mm |
| Infill panel thickness | 44 and 77 mm |
| Maximum dimensions of the leaf | (H×L) L up to 1400 mm, H up to 2600 mm |

Technical parameters:

| | |
|----------------------|------------------------------------|
| Air permeability | Class 4, EN 12207 |
| Water tightness | Class E900 (900 Pa), EN 12208 |
| Wind load resistance | Class C5/B5, EN 12210 |
| Thermal insulation | U_D from 0.66 W/m ² K |
| Burglary-resistance | RC2 |

Rigid and durable aluminium profiles allow to fabricate of large-dimensioned doors

Weather strips provide high water tightness and air permeability, bringing comfort and money savings

MB-79N

U_D from 0.8 W/m²K

Our panel door uses popular, thermally insulated aluminium profile system – MB-79N ST, MB-79N SI and MB-79N SI+. The leaf profile can be combined with special infills, aligned with the surface of the frame.

Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Expansion profiles

They come in three versions: MB-79N ST, MB-79N SI and MB-79N SI+, for a very good thermal performance



Technical details:

| | |
|--------------------------------|----------------------------------------|
| Frame depth | 70 mm |
| Leaf depth | 70 mm |
| Infill panel thickness | 44 and 70 mm |
| Maximum dimensions of the leaf | (H×L) L up to 1400 mm, H up to 2600 mm |

Technical parameters:

| | |
|----------------------|--------------------------------------------|
| Air permeability | Class 3, EN 12207 |
| Water tightness | Class E900 (900 Pa), EN 12208 |
| Wind load resistance | Class C5/B5, EN 12210 |
| Thermal insulation | U _D from 0.8 W/m ² K |
| Burglary-resistance | RC2 |

Specially designed weather strips provide high water tightness and low air permeability, bringing both a comfort and a potential for cost savings

MB-70

U_D from 0.9 W/m²K

The structure of panel doors is based on the popular thermally-broken aluminium sections MB-70 oraz MB-70HI which complete the range of energy-efficient doors in the portfolio. Similarly to other panel door system the leaf profile is designed for coupling with special infill panels that can be installed flush with the door frame plane.

Elegant decorative panels, available in many different patterns and RAL colours and wood effect finishes

Expansion profiles and door leaf panels

Two variants of structure: MB-70 oraz MB-70HI, which enable obtaining very good thermal performance



Technical details:

| | |
|--------------------------------|----------------------------------------|
| Frame depth | 70 mm |
| Leaf depth | 70 mm |
| Infill panel thickness | 44 and 70 mm |
| Maximum dimensions of the leaf | (H×L) L up to 1200 mm, H up to 2400 mm |

Technical parameters:

| | |
|----------------------|-----------------------------------|
| Air permeability | Class 4, EN 12207 |
| Water tightness | Class 7A (300 Pa), EN 12208 |
| Wind load resistance | Class C5/B5, EN 12210 |
| Thermal insulation | U_D from 0.9 W/m ² K |
| Burglary-resistance | RC2 |


The selected seals ensure high water- and air tightness and air, improving the comfort of use and reducing the cost.

BASIC



Insert panels

- Triple glazing units U_g 0.5 W/m²K or U_g 0.7 W/m²K
- Panel thickness from 44 to 72 mm
- U-value
for MB-70HI door U_D from 1.3 W/m²K,
for MB-79N door U_D from 1.0 W/m²K,
for MB-86 door U_D from 0.8 W/m²K,
and for MB-104 Passive door U_D from 0.63 W/m²K
- Four construction variants: ST, HI, SI, SI+ & Aero

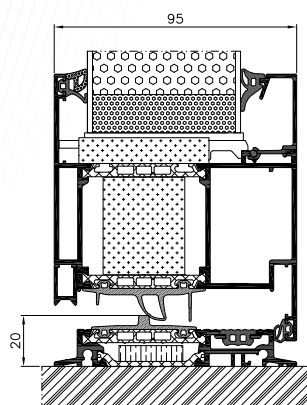


CLASSIC



Aligned on one side

- Triple glazing units U_g 0.5 W/m²K or U_g 0.7 W/m²K
- Panel thicknesses from 44 to 85 mm
- U-value
for MB-70HI door U_D from 1.1 W/m²K,
for MB-79N door U_D from 1.0 W/m²K,
for MB-86 door U_D from 0.64 W/m²K
and for MB-104 Passive door U_D from 0.48 W/m²K
- Four construction variants: ST, HI, SI, SI+ & Aero

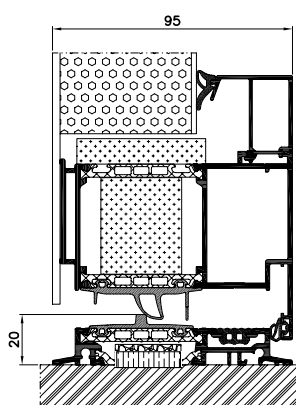


EXCLUSIVE



Aligned on both sides

- Triple glazing units U_g 0.5 W/m²K
- 70 mm thick panel (MB-70 and MB-79N),
77 mm (MB-86) and 95 mm (MB-104 Passive)
- U-value
for MB-70HI door U_D from 0.9 W/m²K,
for MB-79N door U_D from 0.8 W/m²K,
for MB-86 door U_D from 0.66 W/m²K
and for MB-104 Passive door U_D from 0.50 W/m²K
- Four construction variants: ST, HI, SI, SI+ & Aero

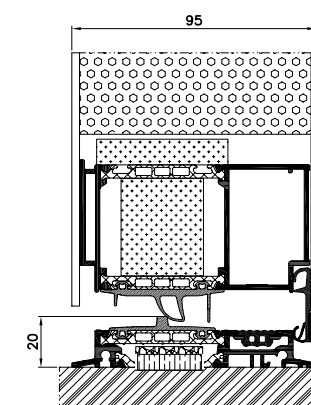

All available models can be inserted into the profiles or glued on one or both sides.



AP21
page 10




AP22
page 10



AP23
page 11



AP24
page 11

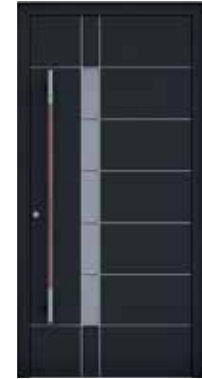

AP25
page 12



AP26
page 12



AP27
page 13



AP28
page 13



AP11
page 13



AP29
page 14



AP30
page 14




AP19
page 14



AP01
page 15



AP02
page 15

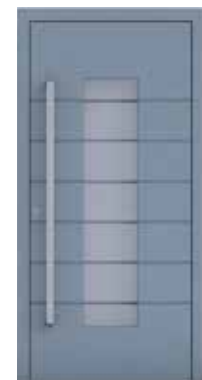


AP31
page 16



AP16
page 16



AP18
page 16

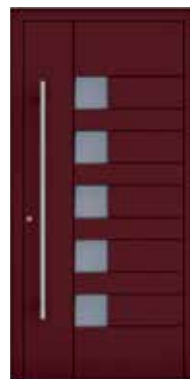

AP07
page 17



AP03
page 17



AP08
page 17



AP13
page 18



AP09
page 18




AP12
page 19



AP15
page 19



AP17
page 19

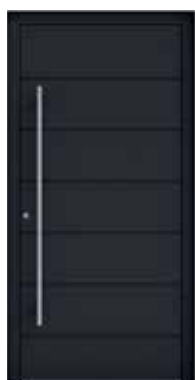

AP05
page 20



AP04
page 20



AP10
page 20



AP20
page 21



AP21

with a sidelite

- APZ 1600 flush pull handle* Flush inlay
- Alunox 5 mm; on the outside face
- Surface finish: RAL 9005



AP22

- APZ 1600 flush pull handle*
- Glass pane:
outer: VSG 33.1
middle: Satinato
inner: insulating glass with low-E coating
- Surface finish: RAL 7021



AP23

- APZ 1600 flush pull handle*
- 5 mm carves; on the outside face
- AP 3021 kickplate
- Surface finish: DB 703



AP24

with a sidelite

- APZ 1600 flush pull handle*
- AP 3021 kickplate
- AP 3500 anti-scratch protection
- Surface finish RAL 9016

* Models with APZ flush pull handle are available for panel thickness range of 65-95mm



AP25

with a sidelite

- AP 200.1400 door pull handle made of high-grade steel/Jatobe wood
- 5 mm flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted glass, chosen motif
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9005



AP26

- AP 40.1600 door pull handle made of high-grade steel
- 5 mm flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- AP 3400 anti-scratch protection
- Surface finish: RAL 3004



AP27

- AP 60.1600 door pull handle made of high-grade steel
- 5 mm carves; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- Surface finish: RAL 7016



AP28

- AP 60.1600 door pull handle made of high-grade steel
- 5 mm Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9016



AP11

- AP 80.1625 door pull handle made of high-grade steel
- 5 mm Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent frame
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9007



AP29

- AP 46.825 door pull handle made of high-grade steel, finished in black
- U-type carves; on the outside face
- Surface finish: Winchester - ADEC D207



AP30

- AP 130.1030 door pull handle made of high-grade steel
- 5 mm flush Alunox inlay; on the outside face
- Surface finish: RAL 7016



AP19

- AP 60.800 door pull handle made of high-grade steel
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9016



AP01

- AP 40.1600 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- AP 3021 kickplate
- AP 3400 anti-scratch protection
- Surface finish: RAL 9005



AP02

with a sidelite

- AP 60.1600 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- AP 3400 anti-scratch protection
- Surface finish: RAL 7016



AP31

- AP 46.1625 door pull handle made of high-grade steel
- Carves; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- Surface finish: RAL 7001



AP16

- AP 60.1600 door pull handle made of high-grade steel
- Carves; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9016



AP18

- AP 80.1625 door pull handle made of high-grade steel
- Carves; on the outside face
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- AP 3021 kickplate
- Surface finish: RAL 7015



AP07

- AP 40.1600 door pull handle made of high-grade steel
- Carves; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent frame
 - inner: insulating glass with low-E coating
- Surface finish: RAL 3004



AP03

- AP 60.1600 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- AP 3021 kickplate
- Surface finish: RAL 7016



AP08

- AP 80.825 door pull handle made of high-grade steel
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent frame
 - inner: insulating glass with low-E coating
- AP 3021 kickplate
- Surface finish: RAL 9016



AP13

- AP 200.1600 door pull handle made of high-grade steel/Jatobe wood
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- Surface finish: RAL 7016



AP09

with a sidelite

- AP 60.1400 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted glass with transparent frame
 - inner: insulating glass with low-E coating
- Surface finish: RAL 7016/ sweet cherry - ADEC C212



AP12

- AP 50.1200 door pull handle made of high-grade steel
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted glass with transparent frame
 - inner: insulating glass with low-E coating
- Surface finish: RAL 9007/RAL 3004



AP15

- AP 50.1200 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: Satinato
 - inner: insulating glass with low-E coating
- Surface finish: walnut - ADEC 0102



AP17

- AP 50.1200 door pull handle made of high-grade steel
- Carves; on the outside face
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted with transparent strips
 - inner: insulating glass with low-E coating
- AP 3300 anti-scratch protection
- Surface finish: DB 703



AP05

- AP 40.1600 door pull handle made of high-grade steel
- Carves; on the outside face
- AP 3021 kickplate
- Surface finish: RAL 9005



AP04

- AP 60.1600 door pull handle made of high-grade steel
- Flush Alunox inlay; on the outside face
- AP 3021 kickplate
- Surface finish: Winchester - ADEC D207



AP10

- AP 60.1800 door pull handle made of high-grade steel
- AP 3400 anti-scratch protection
- AP 3020 kickplate
- Surface finish: RAL 9006



AP20

- AP 60.1600 door pull handle made of high-grade steel
- Glass pane:
 - outer: VSG 33.1
 - middle: sandblasted chosen motif
 - inner: insulating glass with low-E coating
- AP 3400 anti-scratch protection
- Decorative elements: ornamental frame on the outside
- Surface finish: Vien wallnut - ADEC O102

The actual product colours may vary from the colours shown



Pull handle

AP 40

pull handle, dia. 30 mm
(right-angle holders),
stainless steel,
matte, polished

- AP 40.600 30x600 mm
- AP 40.800 30x800 mm
- AP 40.1000 30x1000 mm
- AP 40.1200 30x1200 mm
- AP 40.1400 30x1400 mm
- AP 40.1600 30x1600 mm
- AP 40.1800 30x1800 mm

AP 60

pull handle, 40 x 10 mm
(right-angle holders),
stainless steel,
matte, polished

- AP 60.600 40x10x600 mm
- AP 60.800 40x10x800 mm
- AP 60.1000 40x10x1000 mm
- AP 60.1200 40x10x1200 mm
- AP 60.1400 40x10x1400 mm
- AP 60.1600 40x10x1600 mm
- AP 60.1800 40x10x1800 mm

AP 100

pull handle, 30 x 30 mm
(right-angle holders),
stainless steel,
matte, polished

- AP 100.600 600 mm
- AP 100.800 800 mm
- AP 100.1000 1000 mm
- AP 100.1200 1200 mm
- AP 100.1400 1400 mm
- AP 100.1600 1600 mm
- AP 100.1800 1800 mm

AP 80

pull handle, 40 x 10 mm
(right-angle holders),
stainless steel, matte, polished
or black finished

- AP 80.625 625 mm
- AP 80.825 825 mm
- AP 80.1025 1025 mm
- AP 80.1225 1225 mm
- AP 80.1425 1425 mm
- AP 80.1625 1625 mm
- AP 80.1825 1825 mm

AP 50

pull handle, dia. 30 mm
(holders bent to the side),
stainless steel, matte,
polished

- AP 50.600 30x600 mm
- AP 50.1000 30x1000 mm
- AP 50.1200 30x1200 mm

Available colours:



stainless steel



black

AP 30

pull handle, dia. 30 mm
(holders turned 45 deg.),
stainless steel,
matte, polished

- AP 30.600 30x600 mm
- AP 30.800 30x800 mm
- AP 30.1000 30x1000 mm
- AP 30.1200 30x1200 mm
- AP 30.1400 30x1400 mm
- AP 30.1600 30x1600 mm
- AP 30.1800 30x1800 mm

AP 70

pull handle, 40 x 10 mm
(holders turned 45 deg.),
stainless steel,
matte, polished

- AP 70.600 40x10x600 mm
- AP 70.800 40x10x800 mm
- AP 70.1000 40x10x1000 mm
- AP 70.1200 40x10x1200 mm
- AP 70.1400 40x10x1400 mm
- AP 70.1600 40x10x1600 mm
- AP 70.1800 40x10x1800 mm

AP 110

pull handle, 30 x 30 mm
(holders turned 45 deg.),
stainless steel,
matte, polished

- AP 110.600 600 mm
- AP 110.800 800 mm
- AP 110.1000 1000 mm
- AP 110.1200 1200 mm
- AP 110.1400 1400 mm
- AP 110.1600 1600 mm
- AP 110.1800 1800 mm

AP 90

pull handle, 40 x 10 mm
(holders bent forward),
stainless steel,
matte, polished

- AP 90.600 600 mm

AP 46

pull handle, 40 x 25 mm,
semi-circular (right-angle
holders), stainless steel, matte,
polished or black finished

- AP 46.625 625 mm
- AP 46.825 825 mm
- AP 46.1025 1025 mm
- AP 46.1225 1225 mm
- AP 46.1425 1425 mm
- AP 46.1625 1625 mm
- AP 46.1825 1825 mm

Available colours:



stainless steel



black

Lever handles

AP 200

pull handle, dia. 35 - 40 mm
(right-angle holders),
Jatobe/stainless steel,
matte, polished

- AP 200.800 800 mm
- AP 200.1200 1200 mm
- AP 200.1600 1600 mm

AP 130

pull handle, 30 x 20 mm
(right-angle holders),
stainless steel,
matte, polished

- AP 130.630 630 mm
- AP 130.830 830 mm
- AP 130.1030 1030 mm
- AP 130.1230 1230 mm
- AP 130.1430 1430 mm
- AP 130.1630 1630 mm

AP 210

pull handle, dia. 35 - 40 mm
(holders turned 45 deg.),
Jatobe/stainless steel,
matte, polished

- AP 210.800 800 mm
- AP 210.1200 1200 mm
- AP 210.1600 1600 mm

AP 270

horizontal pull handle

- AP 270 60x550mm


AP 250

horizontal pull handle

- AP 250 480x65mm



lever handle: 1924216X
stainless steel, natural
anode and inox, white,
anthracite, black

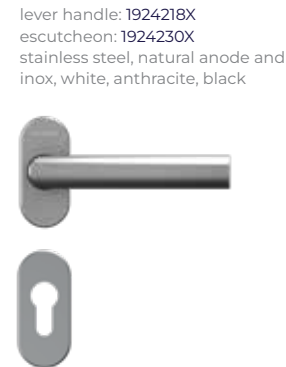

lever handle: 1924218X
escutcheon: 1924230X
stainless steel, natural anode and
inox, white, anthracite, black



lever handle: 1924111X
escutcheon: 1924113X
RAL colours



lever handle: 8001289X
escutcheon: 1924113X
RAL colours, natural
anode, faux anode

Dor-Jan offers a wide range of kickplates and door protection plates as anti-scratch protection of the door surface.

AP 3300

Flush anti-scratch protection,
Alunox



AP 3400

Flush anti-scratch protection,
Alunox



AP 3500

Flush anti-scratch protection,
Alunox



AP 3000

Flush kickplate – Alunox



| 130 mm high

AP 3020

Flush kickplate – Alunox



| 60 mm high


AP 3021

Flush kickplate – Alunox



| 30 mm high

Wood-like coatings and RAL colours

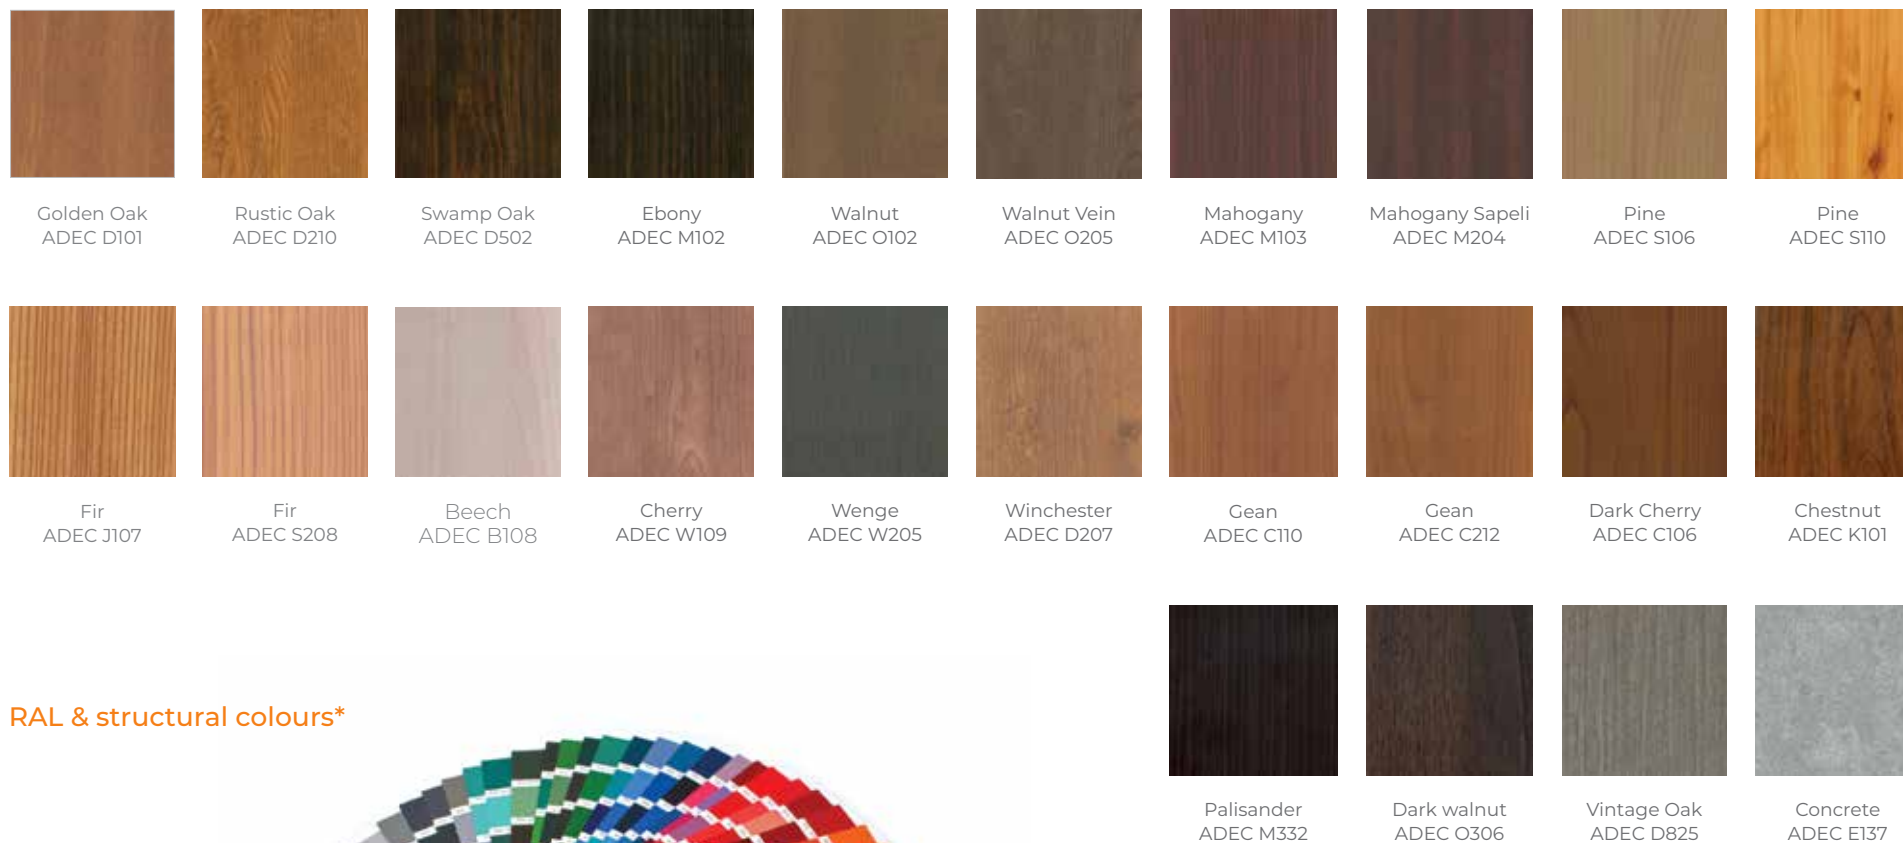

RAL & structural colours*



* All RAL colours and structural colours as per the offer.
The colours may vary slightly from the finished product.

Master-Point
clear glass



Chinchilla
clear glass



Satinato
frosted glass



Master-Ligne
clear glass



Master-Carre
clear glass



Transparent
glass



Dor-Jan offers a wide range of glass with motif, glass made of transparent or ornamental glass in its most popular models

All door models come in variants with sidelight and toplight.

Version 1: glass with motif

Version 2: transparent glass

Version 3: ornamental glass

Sidelights and fixed lights include triple glazing units with warm glass spacers. Sidelights (fixed glazing) can be placed either on one or on both sides of the door assembly. Maximum sidelight width: 1400mm.

Triple glazing: U_g - from 0.5 to 0.7 W/m²K
For depth of frame from 44-85 mm
(black, warm edge spacer bar)

outer: 6 mm laminated safety glass (VSG)
middle: sandblasted glass / leaded stained glass / insulating glass with low-E coating
inner: insulating glass with low-E coating

Quadruple glazing: U_g - 0.5 W/m²K
For 95 mm frame depth
(black, warm edge spacer bar)

outer: 6 mm laminated safety glass (VSG)
middle I: sandblasted glass / leaded stained glass / insulating glass with low-E coating
middle II: insulating glass with low-E coating
inner: insulating glass with low-E coating



28



DOR-JAN

WINDOWS & DOORS

Quality Design Service

DOR-JAN WINDOWS & DOORS
24 ALFRIC SQUARE
PETERBOROUGH
PE2 7JP

www.dorjan.co.uk

07498 983663
07498 983666
07552 033667

dorjancontact@gmail.com